
TECHNICAL SPECIFICATION

AFP-25 Helmet Mounted Faceshield

AFP-25 Helmet Mounted Faceshield / AFF122-440-408

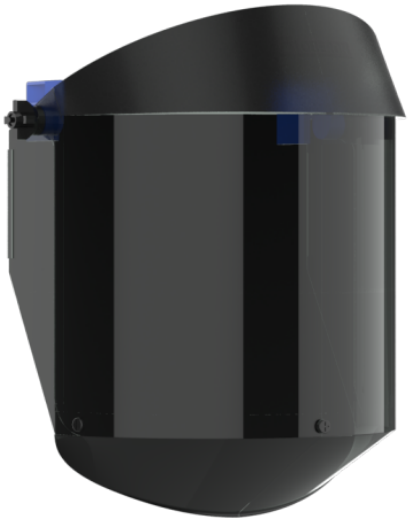

DESCRIPTION

The AFP-25 has been designed to provide the ultimate in industrial-grade arc flash eye and face protection. In collaboration with arc risk specialist manufacturers Oberon, the faceshield has been tested and rated on the JSP EVO® helmet range (*excluding Evo 6100 Full Brim and Evo Vista range), achieving GS-ET-29 arc class 2 and maximum permissible ATPV rating of 25cal/cm² under ASTM F2178. Simple to fit to new or existing EVO® range helmets*, with an optional weight balance system available (compatible with EVO®5 helmet only) to facilitate one-handed stowing for improved working clearance.

OPTIONS

AFP-25 Helmet Mounted Faceshield (AFF122-440-408)

()

SAFETY STANDARDS

EN 166 • EN 170 • ANSI Z87. 1 • GS-ET-29 • ASTM F2178-12

JSP Limited. Worsham Mill. Minster Lovell. Oxford OX29 0TA. England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jspsafety.com / Web: www.jspsafety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jspsafety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

SPECIFICATIONS

RADIATION PROTECTION BREAKDOWN filtering effect Scale Number
2C

Manufacturer's Trademark
JSP Dagger / Oberon Company Logo

Medium Energy Impact resists a 6 mm, 0.86g ball @ 120 m/s Maximum protection for goggles.
B

Resistance to Surface Damage by Fine Particles (optional)
K

Visor Length
340mm

Recyclable
Yes

LIGHT TRANSMISSION BREAKDOWN Lens Shade number
2

Optical Class (1 – Class 1 – High quality for regular use. 2 – Class 2 – Medium quality for occasional use. 3 – Class 3 – Low quality for exceptional use)
1

Protection Against Short Circuit Electric Arc
8

Resistance to fogging (optional)
Yes, But not to "N"

Material
Polycarbonate Visor

Product Weight
465G

FEATURES

Compatible with EVO® range of helmets excluding EVO® 6100 full brim

DOWNLOADS

Image Pack (ZIP)
doc-afp-25-arc-faceshield.pdf (PDF)

JSP Limited. Worsham Mill. Minster Lovell. Oxford OX29 0TA. England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jspsafety.com / Web: www.jspsafety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jspsafety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.