


# TECHNICAL SPECIFICATION



## 2m Steel Cable Anchorage Sling

2m Steel Cable Anchorage Sling / FAR0505

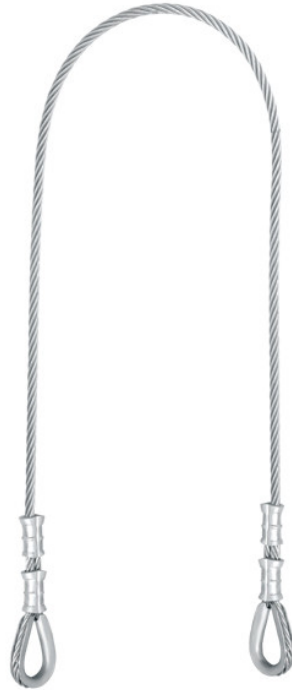

### DESCRIPTION

Made from PVC coated 8mm galvanised wire rope with steel thimbles. For arduous conditions such as construction environments. 23kN breaking load.

### OPTIONS

**2m Steel Cable Anchorage Sling (FAR0505)**

### SAFETY STANDARDS

EN 795



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: [sales@jspsafety.com](mailto:sales@jspsafety.com) / Web: [www.jspsafety.com](http://www.jspsafety.com)

Do Not Publish without written permission from JSP Limited. Contact [copyright@jspsafety.com](mailto:copyright@jspsafety.com). Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 1 of 2 / Issued 23 Aug 2025 / Copyright 2018 - 2025, JSP Limited. All Rights Reserved.



## SPECIFICATIONS

Length  
2m



Rated Weight / Load  
23kN Breaking Strength

Material  
8mm Galvanised Wire, PVC Coated



Product Weight  
800g

## DOWNLOADS



[Image Pack \(ZIP\)](#)



[doc-far0505.pdf \(PDF\)](#)



JSP Limited. Worsham Mill. Minster Lovell. Oxford OX29 0TA. England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: [sales@jspsafety.com](mailto:sales@jspsafety.com) / Web: [www.jspsafety.com](http://www.jspsafety.com)

Do Not Publish without written permission from JSP Limited. Contact [copyright@jspsafety.com](mailto:copyright@jspsafety.com). Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 23 Aug 2025 / Copyright 2018 - 2025. JSP Limited. All Rights Reserved.

