


TECHNICAL SPECIFICATION



2m Steel Cable Anchorage Sling

2m Steel Cable Anchorage Sling / FAR0505

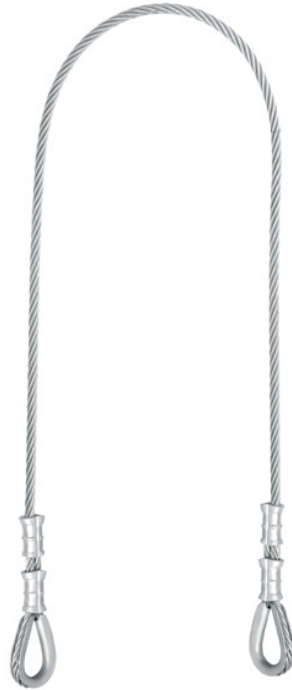

DESCRIPTION

Made from PVC coated 8mm galvanised wire rope with steel thimbles. For arduous conditions such as construction environments. 23kN breaking load.

OPTIONS

2m Steel Cable Anchorage Sling (FAR0505)

SAFETY STANDARDS

EN 795



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jsp-safety.com / Web: www.jsp-safety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jsp-safety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 1 of 2 / Issued 27 Dec 2024 / Copyright 2018 - 2024. JSP Limited. All Rights Reserved.



SPECIFICATIONS

Length
2m

Material
8mm Galvanised Wire, PVC Coated



Rated Weight / Load
23kN Breaking Strength



Product Weight
800g

DOWNLOADS

 [Image Pack \(ZIP\)](#)

 [doc-far0505.pdf \(PDF\)](#)



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jspsafety.com / Web: www.jspsafety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jspsafety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 27 Dec 2024 / Copyright 2018 - 2024. JSP Limited. All Rights Reserved.

