


## Eslinga de anclaje de cable de acero de 2 m

Eslinga de anclaje de cable de acero de 2 m / FAR0505

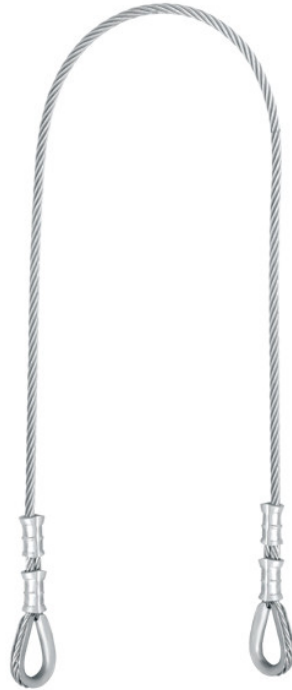

### DESCRIPCIÓN

Hecho de cable galvanizado de 8 mm recubierto de PVC con dedales de acero. Para condiciones severas como entornos de construcción. Carga de rotura de 23kN.

### OPCIONES

**Eslinga de anclaje de cable de acero de 2 m (FAR0505)**

### NORMAS DE SEGURIDAD

EN 795



## ESPECIFICACIONES

Longitud  
2m

Material  
Alambre galvanizado de 8 mm, recubierto de PVC



Peso/carga nominal  
Resistencia a la rotura 23KN



Peso del producto  
800g

## DESCARGAR

 [Colección de imágenes \(ZIP\)](#)

 [doc-far0505.pdf \(PDF\)](#)



JSP Limited. Worsham Mill. Minster Lovell. Oxford OX29 0TA. England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jspsafety.com / Web: www.jspsafety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jspsafety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 27 Jun 2026 / Copyright 2018 - 2026. JSP Limited. All Rights Reserved.

