


# TECHNICAL SPECIFICATION



## Replacement Integrated Lens for EVO® VISTAlens®

EVO® VISTA® Replacement B Rated Indoor/Outdoor Lens / AMV150-000-000

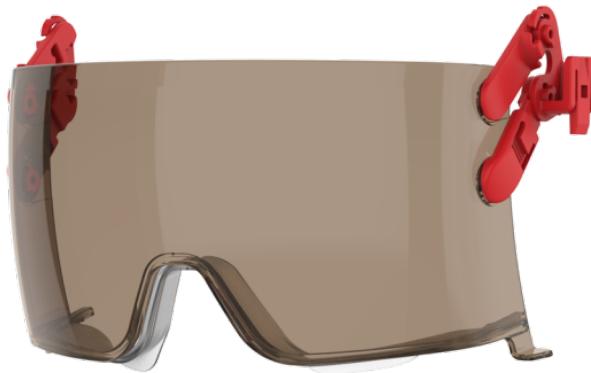

### DESCRIPTION

Replacement Integrated Over Moulded Anti Mist Anti Scratch KN Lens for EVO®VISTAlens® Helmet

### OPTIONS

EVO® VISTA® Replacement B Rated Clear Lens (AMV250-000-000)

Replacement Integrated Lens for EVO® VISTAlens® (AMV250-000-000)

**EVO® VISTA® Replacement B Rated Indoor/Outdoor Lens (AMV150-000-000)**

### SAFETY STANDARDS

EN 172 • ANSI Z87. 1 • EN 166 • AS/NZS 1337.1

JSP Limited. Worsham Mill. Minster Lovell. Oxford OX29 0TA. England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: sales@jpsafety.com / Web: www.jpsafety.com

Do Not Publish without written permission from JSP Limited. Contact copyright@jpsafety.com. Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 1 of 2 / Issued 9 Jan 2026 / Copyright 2018 - 2026. JSP Limited. All Rights Reserved.



## SPECIFICATIONS



RADIATION PROTECTION BREAKDOWN filtering effect  
Scale Number  
5



LIGHT TRANSMISSION BREAKDOWN Lens Shade number  
1.7



Manufacturer's Trademark  
JSP Dagger



Medium Energy Impact resists a 6 mm, 0.86g ball @ 120 m/s Maximum protection for goggles.

Optical Class (1 – Class 1 – High quality for regular use. 2 – Class 2 – Medium quality for occasional use. 3 – Class 3 – Low quality for exceptional use)

1



Resistance to Surface Damage by Fine Particles (optional)  
K



The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures. (-5°C and +55°C) Optional  
T



Product Weight  
79g



Resistance to fogging (optional)  
N

Material  
TPE Seal

Material  
Polycarbonate

Lens Length  
9.5cm



Recyclable  
Yes



BSI Kitemark  
Yes

## FEATURES



### Vision

The retractable optical class 1 overspec lens is moulded with a low base curve, offering a panoramic view and minimal distortion.



### Fully Adjustable

Pivot arms allow EVO® VISTAlens® to be deployed and retracted seamlessly. Smooth adjustment on a wide arc enables an adaptable and individual fit.



### Prescription Protection

Fully compatible with prescription eyewear. Glasses can be worn comfortably under the EVO® VISTAlens® for reduced costs, while ensuring full protection and optimum vision.



### Impact Resistance

The Indoor / Outdoor replacement lens is BT rated, offering medium energy impact protection. Extremes of temperature testing verifies performance at -5°C to +55°C.



### UV and Sunglare Filtering

Lens provides filtering of harmful Ultraviolet (UV) radiation and glare from the sun, offering versatile protection in applications involving indoor and outdoor work.



### TPR Lens Seal

TPR (thermoplastic rubber) seal moulds to the wearer's face for enhanced comfort, a firmer fit, and maximum projectile protection.

## VIDEOS

▶ [www.youtube.com/watch?v=i8-pUlr1t1o](https://www.youtube.com/watch?v=i8-pUlr1t1o)

## DOWNLOADS

Image Pack (ZIP)



JSP Limited. Worsham Mill. Minster Lovell. Oxford OX29 0TA. England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: [sales@jpsafety.com](mailto:sales@jpsafety.com) / Web: [www.jpsafety.com](http://www.jpsafety.com)

Do Not Publish without written permission from JSP Limited. Contact [copyright@jpsafety.com](mailto:copyright@jpsafety.com). Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 9 Jan 2026 / Copyright 2018 - 2026. JSP Limited. All Rights Reserved.

