


# TECHNICAL SPECIFICATION



## EVOSpec® Safety Eyewear

Smoke / ANT120-200-000

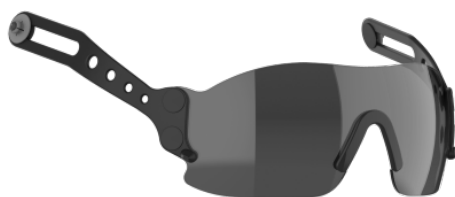

### DESCRIPTION

Retractable polycarbonate eyeshield for use with JSP helmets and browguard systems. EVOSpec® is available in clear and smoke lens options offering optical radiation filtering and low energy impact protection. Simple to fit, ensuring safety eyewear is always available and protected from damage.

Compatible with EVO®3, EVO®5 (excluding DualSwitch™), EVOLite® (excluding Skyworker™ and DualSwitch™), EVO®6100 Full Brim and EVOGuard®.

### OPTIONS

Clear (ANT010-200-000)

**Smoke (ANT120-200-000)**

### SAFETY STANDARDS

EN 172 • EN 166 • ANSI Z87. 1



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: [sales@jsp-safety.com](mailto:sales@jsp-safety.com) / Web: [www.jsp-safety.com](http://www.jsp-safety.com)

Do Not Publish without written permission from JSP Limited. Contact [copyright@jsp-safety.com](mailto:copyright@jsp-safety.com). Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 1 of 2 / Issued 16 Jul 2025 / Copyright 2018 - 2025. JSP Limited. All Rights Reserved.



## SPECIFICATIONS



**RADIATION PROTECTION BREAKDOWN** filtering effect  
Scale Number  
5



**LIGHT TRANSMISSION BREAKDOWN** Lens Shade number  
2.5



Manufacturer's Trademark  
**JSP Dagger**



Low Energy Impact resists a 6 mm, 0.86g ball @ 45 m/s °  
Maximum protection for glasses  
F



Optical Class (1 – Class 1 – High quality for regular use. 2 – Class 2 – Medium quality for occasional use. 3 – Class 3 – Low quality for exceptional use)  
1



Resistance to fogging (optional)  
N



The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures. (-5°C and +55°C) Optional  
T

## FEATURES



### Retractable

Ensures safety eyewear is available when required, never lost, and protected from damage when retracted within helmet shell.



### Easy Assembly

Quick and simple to fit to JSP EVO®Lite, EVO®3, EVO®5, EVO®Vista and EVOGuard browguard.



### Lens Options

EVOSpec® is available in clear and smoke lens options, offering protection against UV light or UV and sunglare, in addition to protection against low energy impact.

## RANGE



## VIDEOS



[youtu.be/LdxMNctXLbg](https://youtu.be/LdxMNctXLbg)

## DOWNLOADS



[Image Pack \(ZIP\)](#)



[doc-evospec-updated-nb2797.pdf \(PDF\)](#)



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: [sales@jgpsafety.com](mailto:sales@jgpsafety.com) / Web: [www.jgpsafety.com](http://www.jgpsafety.com)

Do Not Publish without written permission from JSP Limited. Contact [copyright@jgpsafety.com](mailto:copyright@jgpsafety.com). Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 16 Jul 2025 / Copyright 2018 - 2025. JSP Limited. All Rights Reserved.

